



BASE SECTION ERECTION INSTRUCTIONS NARROW SPAN SCAFFOLD

LIGHT
DUTY

25 LBS./SQ. FT. (500 LB. MAXIMUM) OR 1 PERSON PER ALDEK®
PLATFORM BOARD. 500 LB. MAXIMUM PER SCAFFOLD.

MINIMUM BRACE REQUIREMENTS FOR THIS SECTION
2 HORIZONTALS, 2 DIAGONALS, 2 HORIZONTAL-DIAGONALS






1 READ AND UNDERSTAND ALL INSTRUCTIONS ON THIS SCAFFOLD

WARNING: FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY RESULT
IN SERIOUS INJURY.

2 SET-UP SCAFFOLD BASE SECTION

- A** Attach horizontal brace to outside of frame upright between top rung and rung below. Attach opposite end of brace to other frame at same height.
- B** Attach horizontal-diagonal brace to the vertical post of one frame just above the first horizontal. Attach other end of brace to opposite side of other frame at the same height. Repeat with other horizontal-diagonal brace to form an "X."
- C** Attach diagonal braces to frame rungs to form an "X."
- D** Attach platform at desired height.
- E** Attach horizontal braces to rungs of frames as guardrails.


NOTE: Never climb scaffold without at least 2 diagonal, 2 horizontal and 2 horizontal-diagonal braces in place in base section.



3 LEVEL SCAFFOLD & LOCK ADJUSTABLE LEGS

- A** See "adjustable leg instruction label" located between first and second horizontals.

4 INSTALL GUARDRAILS AND TOEBOARDS

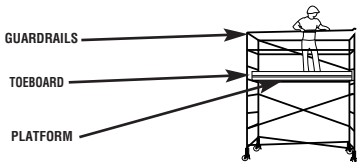

CAUTION

READ INSTRUCTION LABEL ON UNDERSIDE OF PLATFORM

OSHA

REQUIRES

TOEBOARDS, HANDRAIL AND SCREENING

CHECK OSHA & STATE CODES FOR DETAILS OF REQUIREMENT